

Installation instructions

DRC Fender Eliminator Kit CRF250L / RALLY '21-


Thank you for purchasing our DRC product.

In order to use this product correctly, please read this manual carefully before use.

1.Important notes

- Special knowledge and skills are required for installation. Careless work may cause an unexpected accident or failure.
- Please purchase a reflector separately and install.
- Be sure to check the lights before riding.
- This product cannot be used with other optional parts if they interfere with this product.
- Do not process or modify the product. It may cause an accident or damage.

2.Set Contents

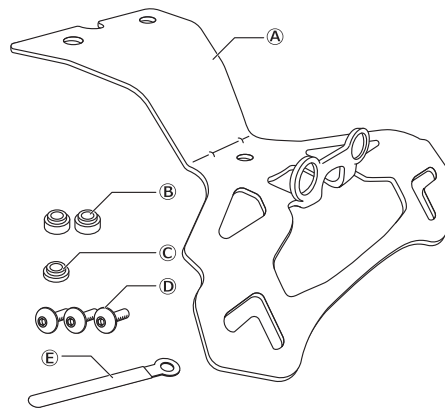


Set Contents

Ⓐ Stay body	 1ea
Ⓑ 7.5mm Spacer	 2ea
Ⓒ 5.5mm Spacer	 1ea
Ⓓ Taper cap bolt	 3ea
Ⓔ Harness clip	 1ea


3.Installation

- 1) Remove the seat and rear fender from the bike. Disconnect the license plate light coupler*, and then remove the license plate bracket (Fig 1).


*There are usually brown and green wires coming out from the number light coupler.

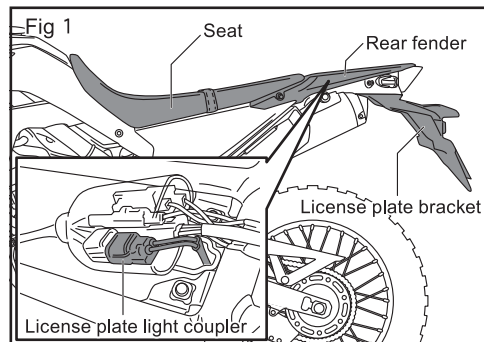

- 2) Remove the license plate light from the license plate bracket, and replace it on the Ⓐ stay body. Note the order and direction of each part when installing (Fig 2).

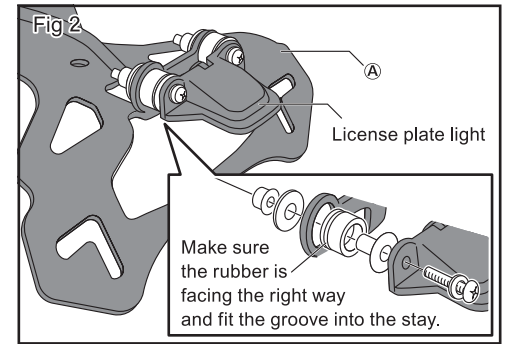

- 3) Pass the license plate light coupler through the wiring hole, and attach Ⓐ stay body to the bike body using Ⓑ 7.5mm spacers, Ⓒ 5.5mm spacer, and Ⓓ taper cap bolts (Fig 3). Fasten the wiring using the Ⓔ harness clip.

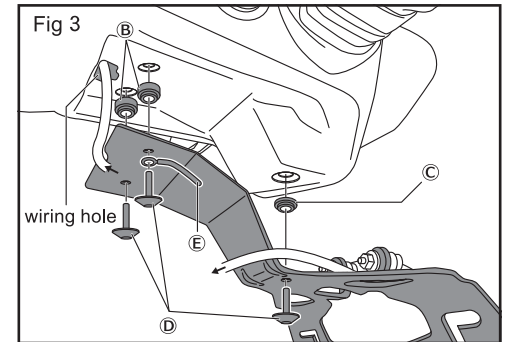

- 4) Connect the license plate light coupler and reinstall the rear fender and the seat (Fig 4).

