

# Installation Instructions

## DRC Touring Carrier KLX230/S/SM/SHERPA

Thank you for purchasing our DRC product.  
Please read this manual thoroughly before using this product to ensure proper operation.


### 1.Important Note

- Special knowledge and skills are required for installation. Careless work may cause an unexpected accident or failure.
- This product cannot be used with other optional parts if they interfere with this product.
- Please work in a flat area.
- Always stop the engine and ensure all parts have completely cooled before performing any work. Failure to do so may result in burns or other injuries.
- If any defect is found, stop work and contact us.
- Do not process or modify this product. It may cause an accident or damage.
- Check regularly for loose bolts.  
\*Installation may become compromised due to vibration or impact.
- Maximum load on this product is **5kg**. Please do not load luggage exceeding this limit.

### 2.Set Contents

#### Set Contents


|                          |     |
|--------------------------|-----|
| Ⓐ carrier body .....     | 1ea |
| Ⓑ spacer .....           | 4ea |
| Ⓒ M8×35mm cap bolt ..... | 4ea |

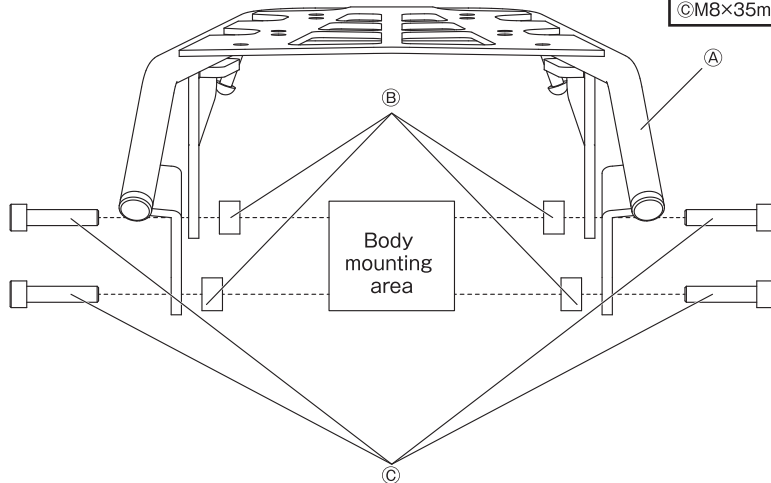


### 3.Installation

Please refer to the service manual published by the manufacturer of the bike.

- 1) Refer to the service manual and remove both left and right side covers, as well as the stock bolts indicated in the illustration (Fig 1).

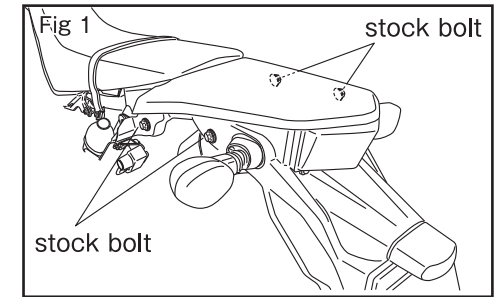

- 2) Temporarily assemble Ⓐ carrier body using Ⓑ spacers and Ⓒ M8×35mm cap bolts, as shown in Fig 2. Please keep the stock collars in place.

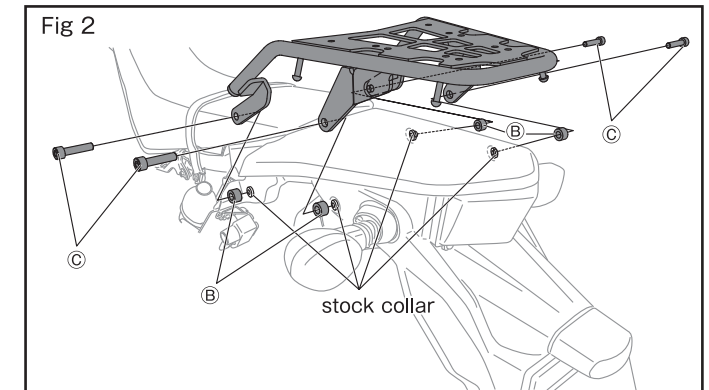

- 3) Once the temporary assembly is complete, tighten all bolts securely.

\*If you skip the temporary assembly and proceed directly to installation, some bolts may become impossible to install.