

Installation instructions

DRC F-STUCK BELT

Thank you for purchasing the DRC product.


Please read these instructions carefully before installing.

1. Important note

- Special knowledge and skills are required for installation.
Careless work may cause an unexpected accident or failure.

- Please do not modify this product.


2. Product content



3. Installation

1) Remove the following parts according to the service manual.


- Front wheel
- Front brake caliper
- Clutch side fork guard. Or brake hose clamp
- Front fender

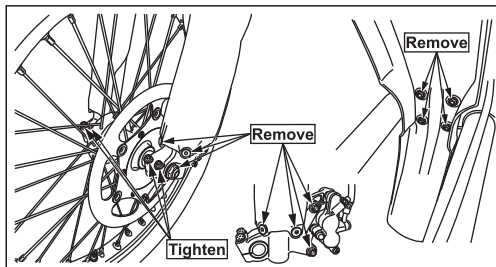

2) Bring the rubber to the center of the stack belt and pass through the stack belt from under the front fork.

* At this time, do not pass the brake hose and speed sensor. It may cause damage.

3) Pass the rubber to the bottom of the under bracket and move the rubber toward the fork to fix it.

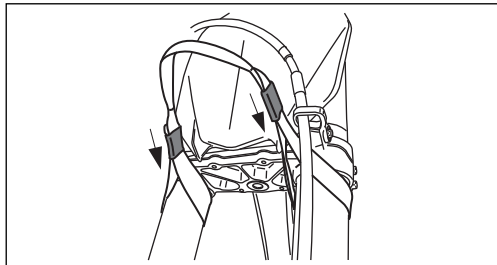

4) Attach the removed parts to complete the work.

