

Installation instructions

DRC TOURING CARRIER MONKEY125 '19-

Thank you for purchasing this DRC product.

Please read these instructions carefully before installing.

1. Important note


- Special knowledge and skills are required for installation.
Careless work may cause an unexpected accident or failure.

- This product can not be used with other optional parts if they interfere with this product.

- Check regularly for loose bolts.
*Installation may become loose due to vibration or impact.

- Please do not modify this product.

2. Set content

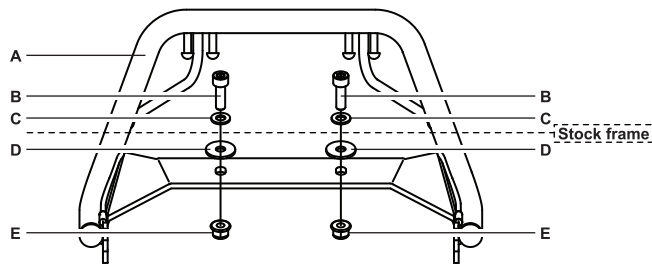


Set content

A. Carrier	-----1
B. M8×25 Cap bolt	-----2
C. M8 Washer	-----2
D. M8 Rubber washer	-----2
E. M8 Lock nut	-----2


3. Installation

1) Remove the mounting bolt and remove the entire seat by sliding it back.

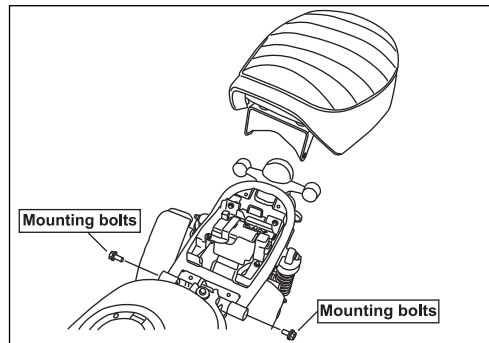


2) Loosen the upper mounting nut of the rear cushion so that there is a gap of about 5 mm on both the left and right.

*If the nut is removed completely, the rear cushion may come off.

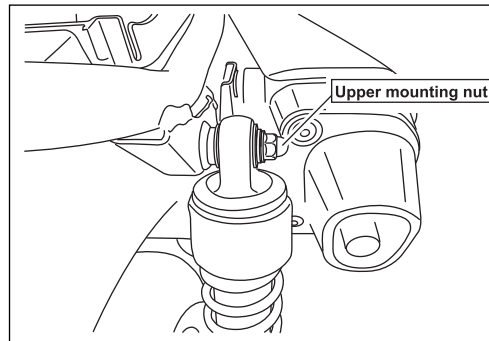


3) Insert the right and left U-grooves into the rear cushion mounting part while inserting the center mounting part between the frame and the rear fender.

*Pay attention to the part where the U groove is inserted. (See right figure)

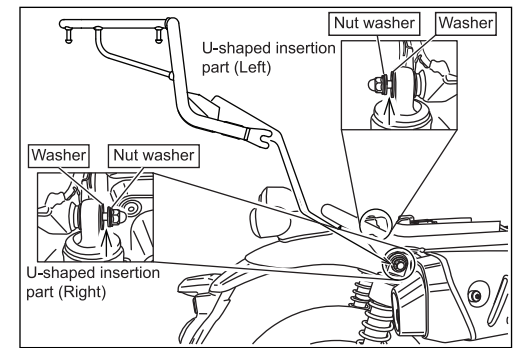


4) Install the center mounting part using included B, C, D and E.

*Attach the rubber washer (D) to the carrier and the stock frame.

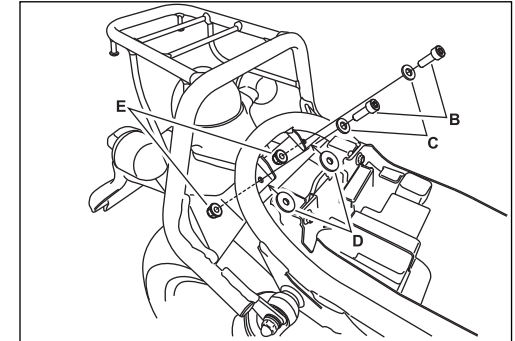

5) Use a torque wrench to secure the rear cushion mounting bolts at 30N·m (3.0Kgf·m)

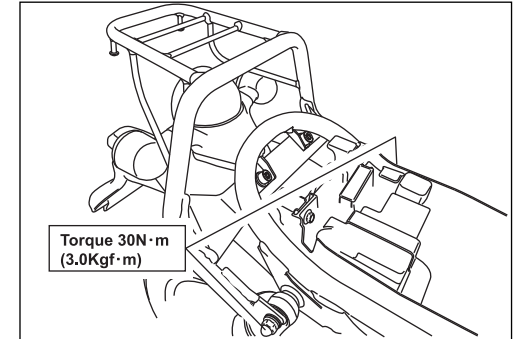

6) Fit the convex part on the back side of the seat into the guide and attach the seat to the original position.

*Depending on the bike, the carrier may interfere with the seat when it is fitted into the guide.

