

Installation instructions

ZETA Handle Brace

Thank you for purchasing our ZETA product.
Please read this manual thoroughly before using this product to ensure proper operation.


1.Important Note

- Do not process or modify this product. It may cause an accident or damage.
- This product cannot be used with other optional parts if they interfere with this product.
- Special knowledge and skills are required for installation. Careless work may cause an unexpected accident or failure.
- Regularly check the bolts used in this product for looseness and tighten them as necessary.
- If any abnormality occurs with this product while riding, immediately stop the vehicle in a safe place and inspect the abnormal area.
- This product has been anodized. Prolonged exposure to ultraviolet light may cause discoloration.
- Specifications may be changed without notice for improvement purposes.
- By using this product, you are deemed to have understood and agreed to all the contents of this document.
- We assume no responsibility for accidents or damages resulting from use that does not comply with the precautions in this document.
- Please keep this document in a safe place where you can easily access and read it at any time.
- If transferring the product to a third party, be sure to include this document as well.


3.Installation

- 1) Referring to Fig 1, attach the plastic collars to the handlebar, and temporarily assemble the clamps and crossbar on both the left and right sides using the provided bolts.

* The clamps have a harness clip function, allowing you to neatly organize the wiring harnesses for handlebar switches and other components.

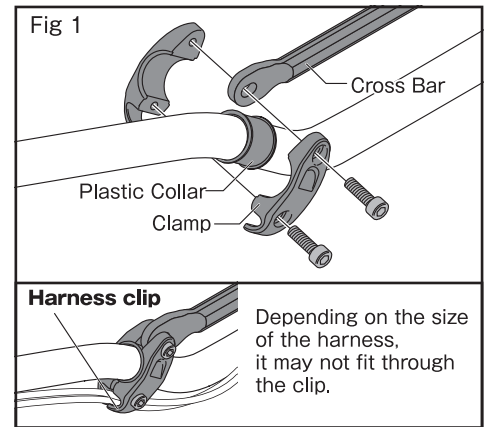

- 2) Make fine adjustments so that the crossbar is horizontal. Once the position of the crossbar is determined, fully tighten the bolts of the left and right clamps in the order of ① → ② to secure it completely (Fig 2). After installation, check that there is no play in the crossbar.

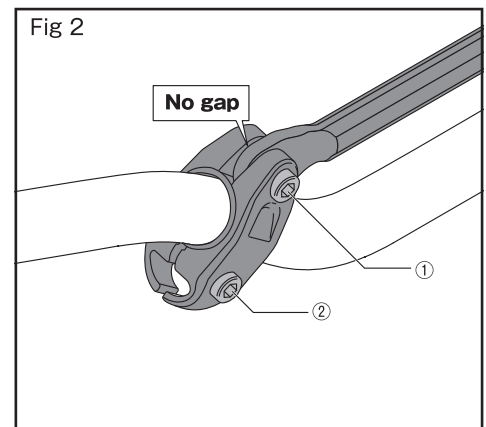

2.Set Contents

