

Installation Instructions

ZETA Frame Guard KLX250/D-TRACKER/X '93-

Thank you for purchasing ZETA product. Please read instructions carefully prior to installation.

1. Important notes

Installation requires special knowledge and technique. Haphazard installation may cause accidents or failure.

Do not modify this kit.



This kit can not be used with other optional parts if they interfere with this kit.

Tighten all bolts and nuts in regular basis.


2. Installation

* Remove right side stock frame guard and bolts that hold rear brake master cylinder.

* Stock frame guard will not be re-used.

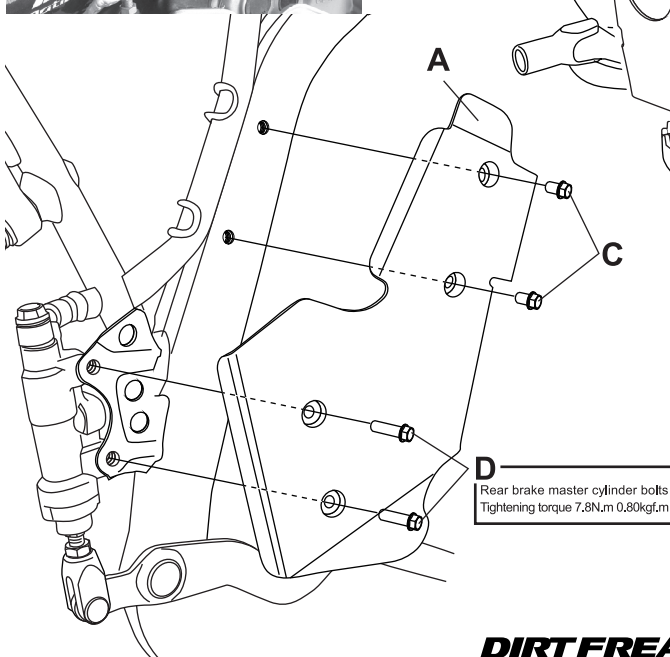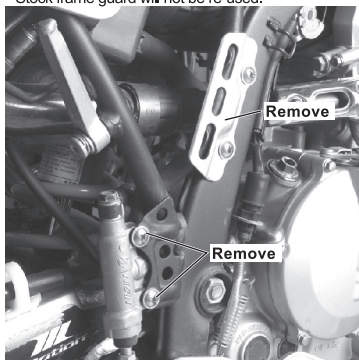

D
Rear brake master cylinder bolts
Tightening torque 7.8N.m 0.80kgf.m

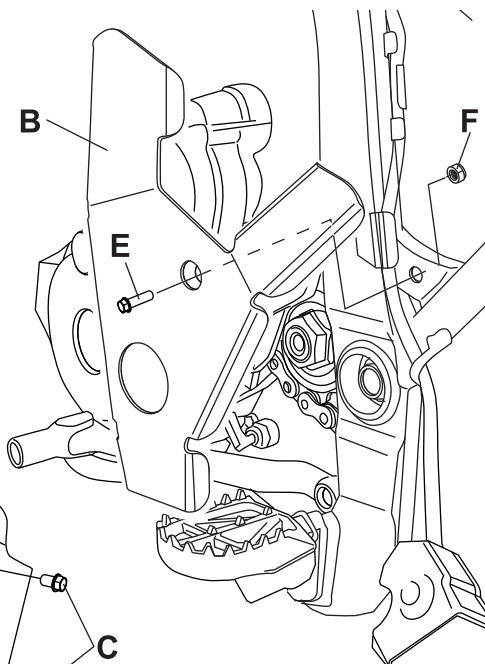

Contents of kit

- A. Frame guard Right..... 1 pc
- B. Frame guard Left.....1 pc
- C. M6-10 Flange bolt..... 2 pcs
- D. M6-20 Flange bolt..... 2 pcs
- E. M6-16 Flange bolt.....1 pc
- F. M6 Flange nut1 pc