

Installation Instructions

ZETA RADIATOR GUARD YZ125 '05-/YZ125X '17-

Thanks for purchasing ZETA RADIATOR GUARD.

Please check contents of kit and read these instructions carefully prior to installation.

1. Important notes


- Installation requires special knowledge and technique. Haphazard installation may cause accidents or failure.
- This kit can not be used with other optional parts if they interfere with this kit.

- Please do periodic check of the bolt and nut and retorquing them regularly.

2. Nomenclature and contents of kit

Left side parts

OE radiator louver L

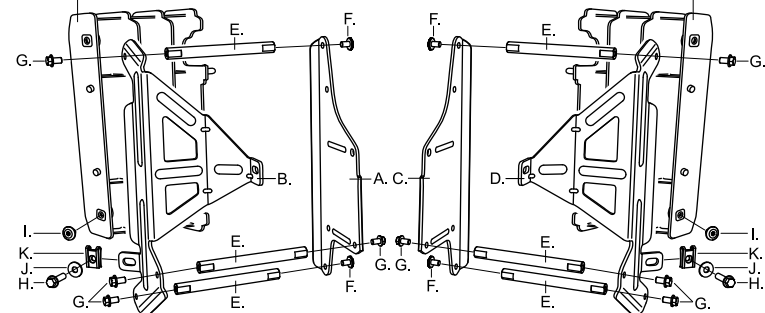

Right side parts

OE Radiator louver R

Contents of kit

- A. Radiator guard L1 -----1pc
- B. Radiator guard L2 -----1pc
- C. Radiator guard R1 -----1pc
- D. Radiator guard R2 -----1pc
- E. Shaft -----6pcs
- F. M6×10 Tapered bolt -----4pcs
- G. M6×10 Flange bolt -----8pcs
- H. M6×20 Flange bolt -----2pcs
- I. M6×09 Low head bolt -----2pcs
- J. M6 Washer -----2pcs
- K. Clip nut -----2pcs


3. Installation

- Removing covers around fuel tank


- 1) Drain radiator coolant.
- 2) Remove seat, radiator shrouds, fuel tank, radiator louvers and radiators.
*Refer your service manual for removing these parts from your bike.

- Installing radiator guards


- 1) Attach parts on radiator guards as shown in below figure.

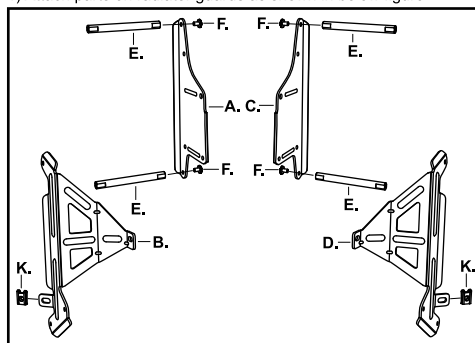


- 2) Attach radiator guard A.

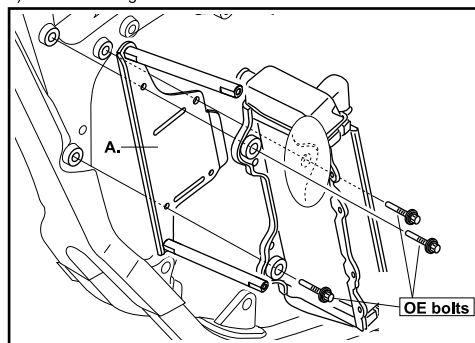


- 3) Re install OE radiator louver.
- 4) Attach shaft E at back side of radiator.

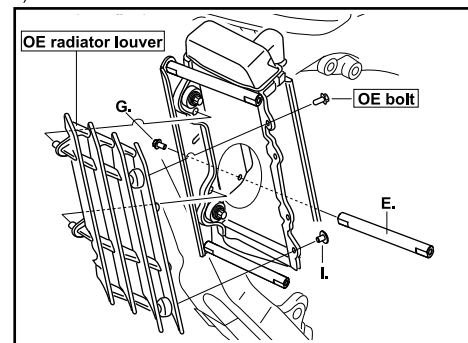


- 5) Install radiator guard C, and re install right side radiator.

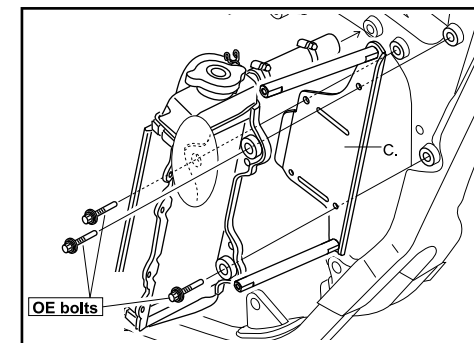


- 6) Reinstall OE radiator louver.
- 7) Attach shaft E at back side of radiator

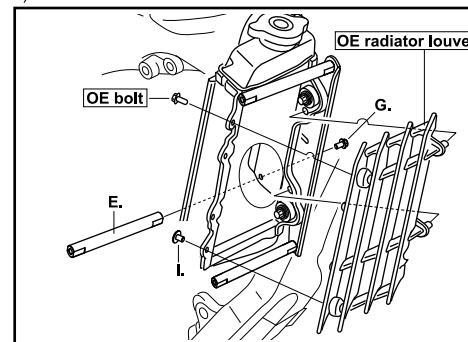


- 8) Reinstall fuel tank

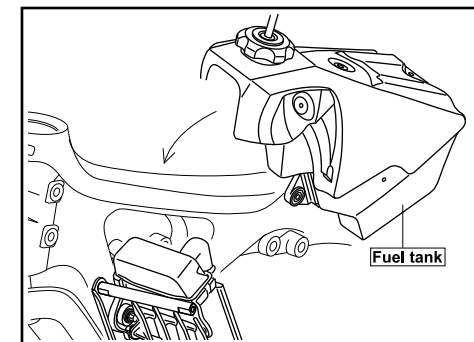

- 9) Attach radiator guard B in between radiator and radiator hose.

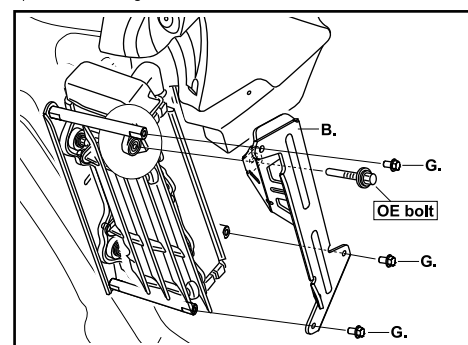

- 10) Attach radiator guard D.

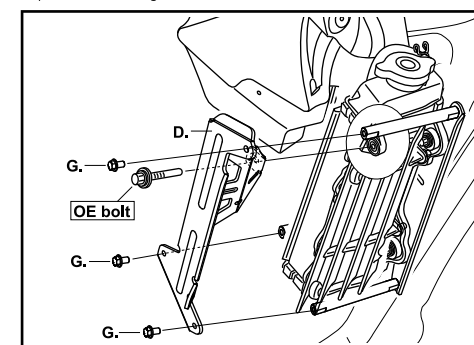

- Reinstall covers around fuel tank.

- 1) Reinstall radiator shrouds and seat.
Use Flange bolt H and washer J for installing radiator shrouds on radiator guards.
*Refer your service manual for these installations.
- 2) Pour radiator coolant.
- 3) Start your engine and verify that are no coolant is leaking from radiators and hoses.