

Installation Instructions

ZETA RADIATOR GUARD YZ250F '19-, YZ450F '18-, YZ450FX '19-

Thank you for purchasing ZETA products.

Please read these instructions carefully prior to installation.


1. Important notes

- Installation requires special knowledge and technique. Haphazard installation may cause accidents.

- Inspect each bolt and nut regularly, and retighten as necessary.

- This kit can not be used with other optional parts if they interfere with this kit.

2. Name of each part and set contents

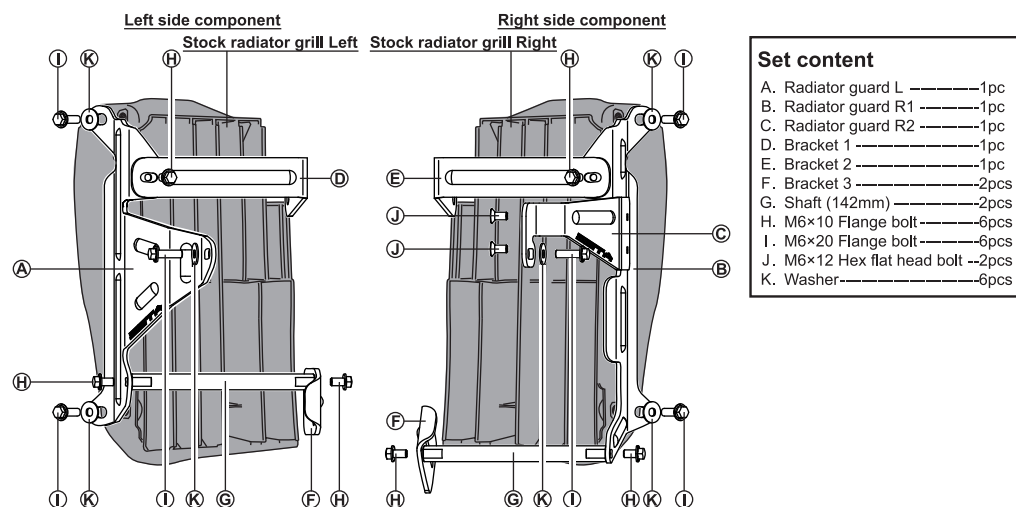

3. Installation



- Removal of stock cover

1) Remove the seat → air filter case cover → shroud left / right → radiator guard left / right → radiator left / right.
* Refer to the service manual for removing each part.


- Guard installation

1) Assemble the following parts in advance.


2) Pre-install D and FGH between the frame and the radiator.
At this time, attach clutch wires etc. to the frame side.

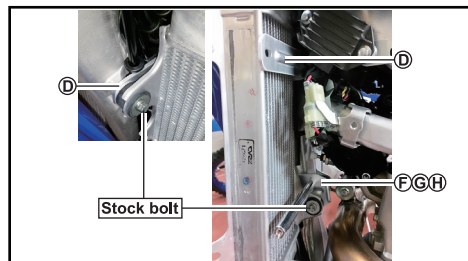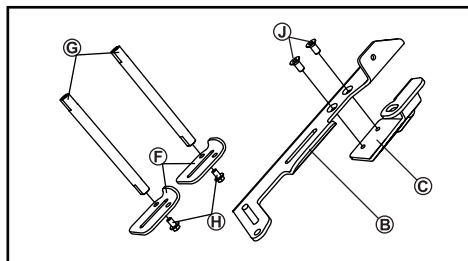


3) Install the genuine radiator guard L.

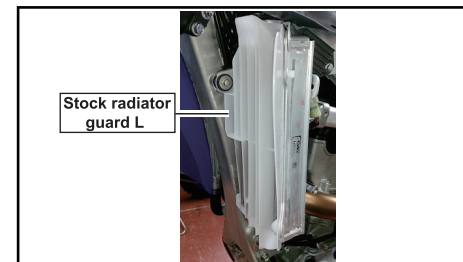


5) Remove the fixed stock bolt and install the shroud.
* The stock bolt on the shroud side can not be used.

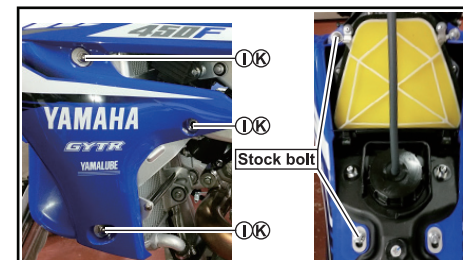


7) Install stock radiator guard R.

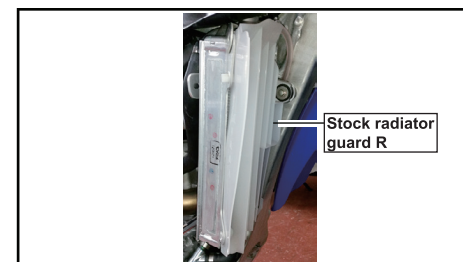


9) Remove the fixed stock bolt and install the shroud.
* The stock bolt on the shroud side can not be used.

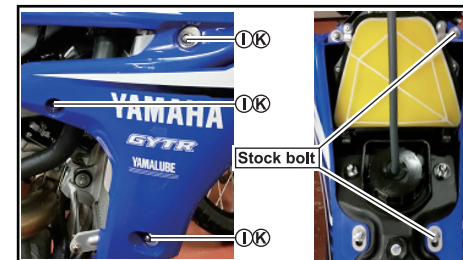


4) Install A. At this time, note the mounting portion with the air cleaner cover, fix the mounting portion of the shroud with stock bolt, and then tighten H and the mounting bolt of the radiator main body.

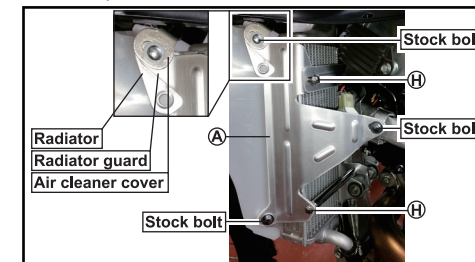

6) Pre-install E and FGH between the frame and the radiator.
At this time, set the breather hose between the FGH and the radiator.

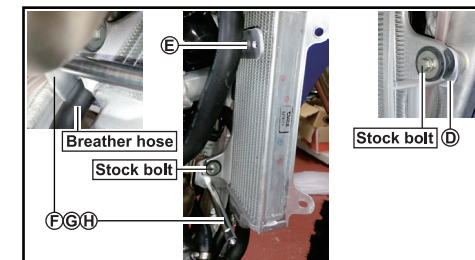

8) Install the BCJ. At this time, note the mounting portion with the air cleaner cover, fix the mounting portion of the shroud with stock bolt, and then tighten H and the mounting bolt of the radiator main body.

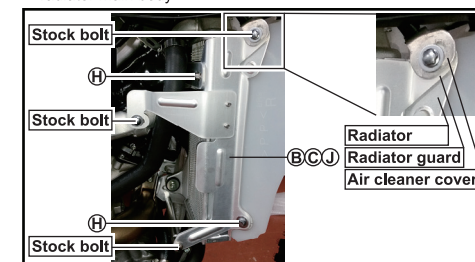

10) Install the air filter case cover and the seat.