

Installation instructions

ZETA HEADLIGHT GUARD MONKEY125

Thank you for purchasing the ZETA product.

Please read these instructions carefully before installing.

1. Important note

- Please do not modify this product.
- This product can not be used with other optional parts if they interfere with this product.
- Special knowledge and skills are required for installation. Careless work may cause an unexpected accident or failure.

2. Installation




1) Attach the PC protector to the guard body. (See Fig. 1)

- * Please remove the protective sheet of PC protector.
- * To prevent it from falling off, apply a low-strength thread locker.

2) Remove stock headlight adjustment bolt and pre-set the stay. (See Fig. 2)

3) Use the included spacers and bolts to pre-set the guard to the bike. After fine-adjusting the guard and stay positions, tighten the bolts and nuts. (See Fig. 3)

- * Check for loose bolts regularly.

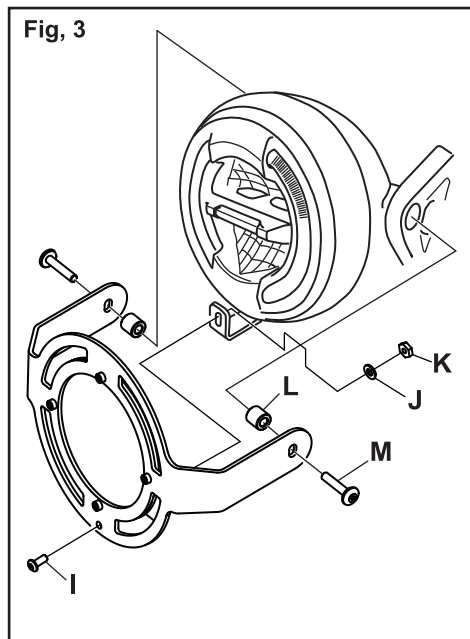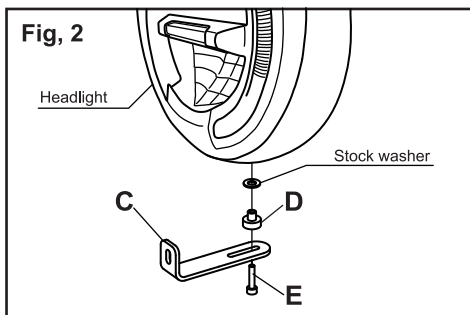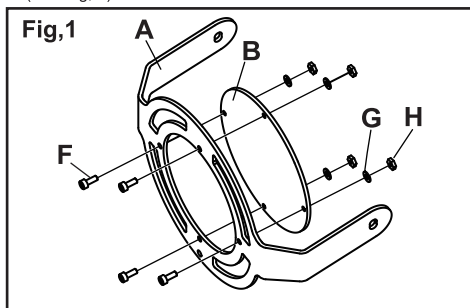

SET CONTENT

A. Guard ----- 1	D. M4 Spacer ----- 1	G. M4 washer ----- 4	J. M5 washer ----- 1	M. M6 bolt 30mm --- 2
B. PC protector -- 1	E. M4 bolt 18mm --- 1	H. M4 nut ----- 4	K. M5 nut ----- 1	
C. Stay ----- 1	F. M4 bolt 10mm --- 4	I. M5 Bolt 10mm --- 1	L. M6 Spacer ----- 2	

PC protector

- If it gets dirty due to sand or dust, wash it off with water and neutral detergent.

* Cleaning the surface with sand or dust may cause scratches.

* Do not use parts cleaners, thinners, solvents such as benzene, or dry cloth.

- If the light irradiation decreases due to damage, scratches, or yellowing of the protector, replace it.

Replacement PC protector : ZE52-4990