ZE52-054J

取扱説明書

ZETA RACING アルミフロントディスクガード CRF250L '17- CRF300L '21-

この度はZETA RACING商品をお買い上げいただき、誠にありがとうございます。
下記の内容をよくご覧になり正しく作業を行ってください。

1.注意事項


・作業には専門の知識と技術が必要です。不用意に作業を行うと思わぬ事故や故障の原因となる場合があります。
・既に車両に装着されている純正部品以外の製品、部品等によって本製品と干渉し使用できない場合があります。
・作業は平坦な場所で車体を安定させた状態で行ってください。
・必ずエンジンを停止し、各部が完全に冷えている状態で作業を行って下さい。火傷等の原因になります。
・異常が認められた場合は作業を中断し、弊社までお問合せ下さい。
・製品に対し、加工・改造を行わないでください。事故や破損の原因になります。

2.取付け方法

1）フロントホイールを取外します。
※取外しは車両のサービスマニュアルを参照してください。

2）ブレーキ側のサイドカラーとディスクガードを入れ替え車体に取付けます。

3）ディスクガードがフロントフォークに干渉していないことを確認し、アクスルシャフト、アクスルホルダボルトを締め付けます。
※締め付けトルクは車両のサービスマニュアルを参照してください。

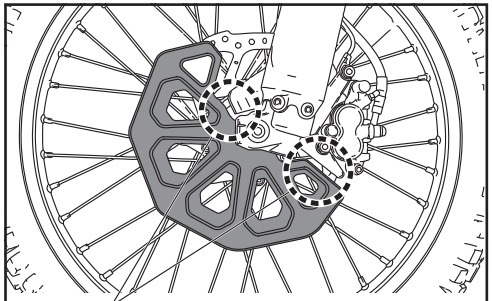

【ご注意】
フォークに干渉しないよう、隙間を開けること。

株式会社 ダートフリーク 〒489-0005 愛知県瀬戸市中水野町2-30

ZE52-054E

Installation Instructions

ZETA RACING Aluminum Front Disc Guard CRF250L '17- CRF300L '21-

Thank you for purchasing our ZETA RACING product.
Please read this manual thoroughly before using this product to ensure proper operation.

1.Important notes


・Special knowledge and skills are required for installation. Careless work may cause an unexpected accident or failure.
・This product cannot be used with other optional parts if they interfere with this product.
・Please work in a flat area.
・Be sure to stop the engine and allow all parts to cool completely before performing any work. Failure to do so may result in burns or other injuries.
・If any defect is found, stop work and contact us.
・Do not process or modify this product. It may cause an accident or damage.

2.Installation

1) Remove the front wheel.
*Refer to the vehicle service manual for the removal procedure.

2) Replace the brake-side collar with the Disc Guard, then install it onto the vehicle.

3) Confirm that the Disc Guard does not interfere with the front fork, then tighten the axle shaft and axle holder bolts.
*Refer to the vehicle service manual for the specified tightening torque.

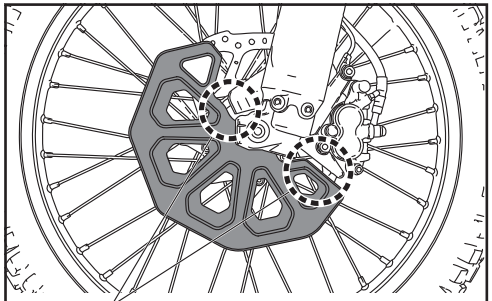

【Attention】
Ensure sufficient clearance so that the product does not interfere with the fork.

DIRTFREAK Co. 2-30 NAKAMIZUNO SETO AICHI 489-0005 JAPAN